

LAD ALUMINIUM PREMIER RETRACTABLE LADDER

LAD 400 70 x 120

LAD 345 70 x 90

2 year
warranty



white metal hatch



finishing metal lining slats



peripheral seal



non-slip treads



possibility of detaching
segments



possibility of installing
additional accessories




system of quick installation
in the ceiling




system of adopting the ladder
length to the ceiling height



fully assembled and ready
for quick installation in the ceiling

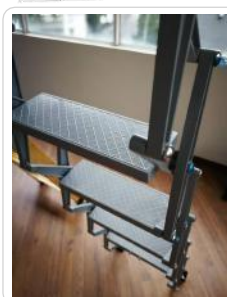

ATTIC LADDER DIAGRAM 70x 120

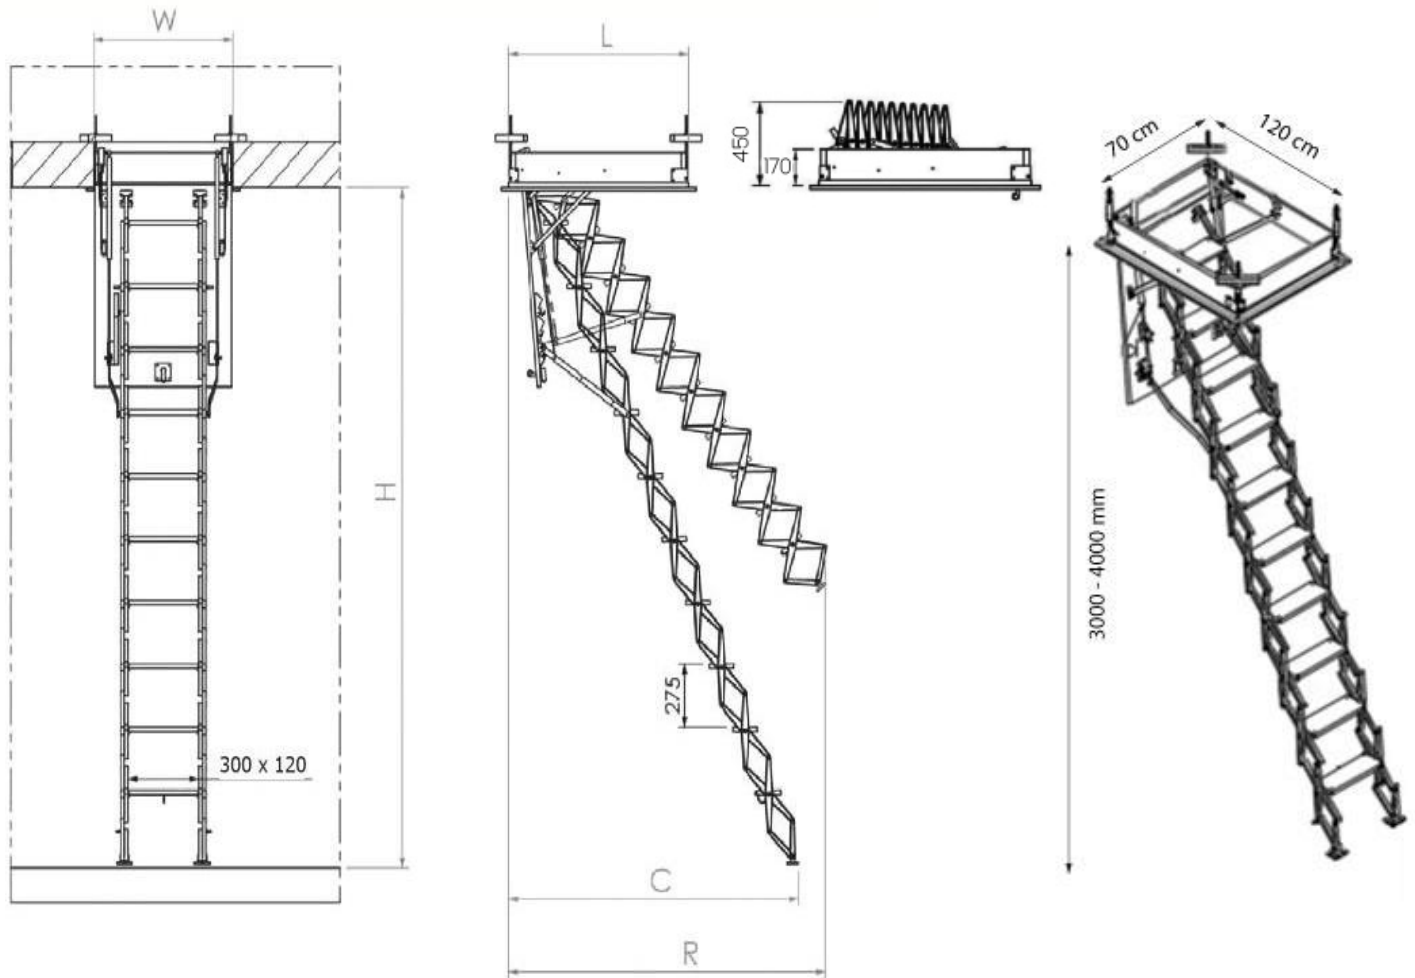


TECHNICAL SPECIFICATION | 70x120

Ladder Type	LAD Aluminium Retractable Attic Ladder
Box	Timber
Hatch colour	Metal, White
Ladder	Aluminium, length of the ladder adjusted to the room height
Treads	Anti-slip, possibility to remove or add tread
Finishing trims	Aluminium die-cast retractable
Maximum loading	200 KG
Tread length (E)	300 mm
Tread length (S)	120
Distance between treads (G)	275 mm
Standard number of treads	11 units (height 3205mm) can be added maximum 14 units height 4000mm

TECHNICAL PARAMETERS FOR LADDERS IN PARTICULAR SIZE

	Ladder length	11 treads	12 treads	13 treads	14 treads
Reserve support frame internal size opening (mm)	695 x 1195				
Box external dimensions (mm) (W x L)	695 x 1195				
Height of folded ladder (mm) (K)	300 - 400				
Box height (mm)	160 + 50				
Room height (mm) (H)		< 3205 mm	< 3480 mm	< 3755 mm	< 4000 mm
Swing space (mm) (R)		1840 mm	1980 mm	2120 mm	2260 mm
Distance after ladder unfolding (mm) (C)		1730 mm	1860 mm	2000 mm	2130 mm

ATTIC LADDER DIAGRAM 70x 90

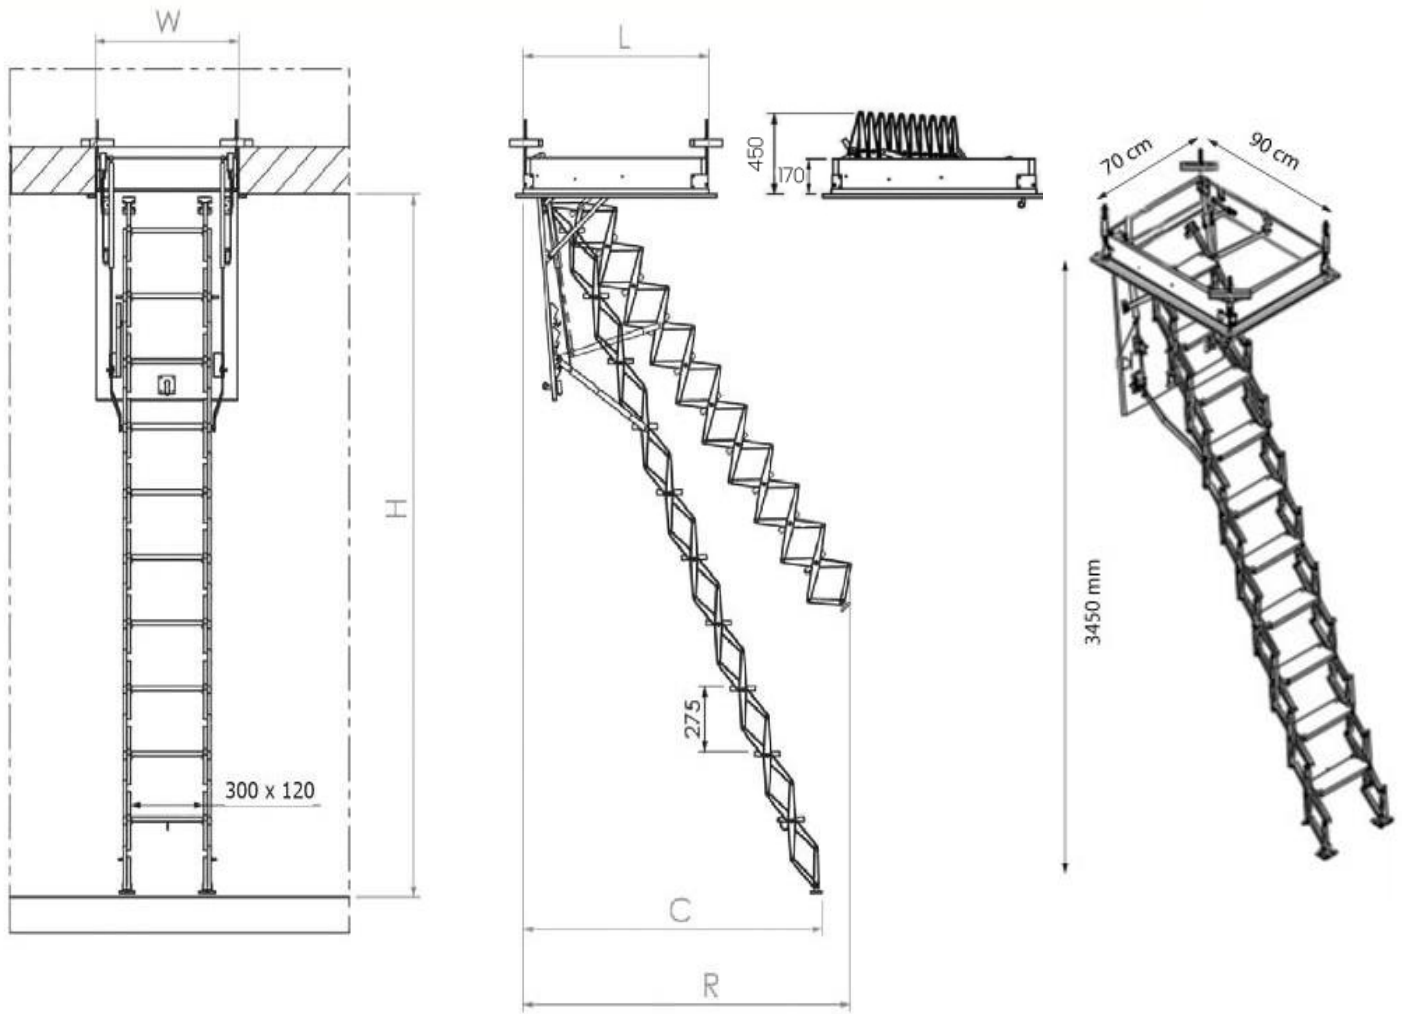

TECHNICAL SPECIFICATION | 70x90

Ladder Type	LAD Aluminium Retractable Attic Ladder
Box	Timber
Hatch colour	Metal, White
Ladder	Aluminium, length of the ladder adjusted to the room height
Treads	Anti-slip, possibility to remove or add tread
Finishing trims	Aluminium die-cast retractable
Maximum loading	200 KG
Tread length (E)	300 mm
Tread length (S)	120
Distance between treads (G)	275 mm
Standard number of treads	9 units (height 3205mm) can be added maximum 12 units height 3450mm

TECHNICAL PARAMETERS FOR LADDERS IN PARTICULAR SIZE

	Ladder length	8 treads	9 treads	10 treads	11 treads	12 treads
Reserve support frame internal size opening (mm)	695 x 895					
Box external dimensions (mm) (W x L)	695 x 895					
Height of folded ladder (mm) (K)	345					
Box height (mm)	160 + 50					
Room height (mm) (H)		<2380 mm	< 2655 mm	< 2930 mm	< 3205 mm	< 3480 mm
Swing space (mm) (R)		1450 mm	1580 mm	1700 mm	1840 mm	1980 mm
Distance after ladder unfolding (mm) (C)		1350 mm	1480 mm	1600 mm	1730 mm	1860 mm